




Nut Splitter Technical Specifications

Our hydraulic nut splitter offers a reliable and effective solution to the removal of seized or corroded nuts, without the need for hot cutting, chiselling or grinding. The nut splitter utilises a powerful, lightweight cylinder to drive a precision engineering cutting blade into the flat of the nut.

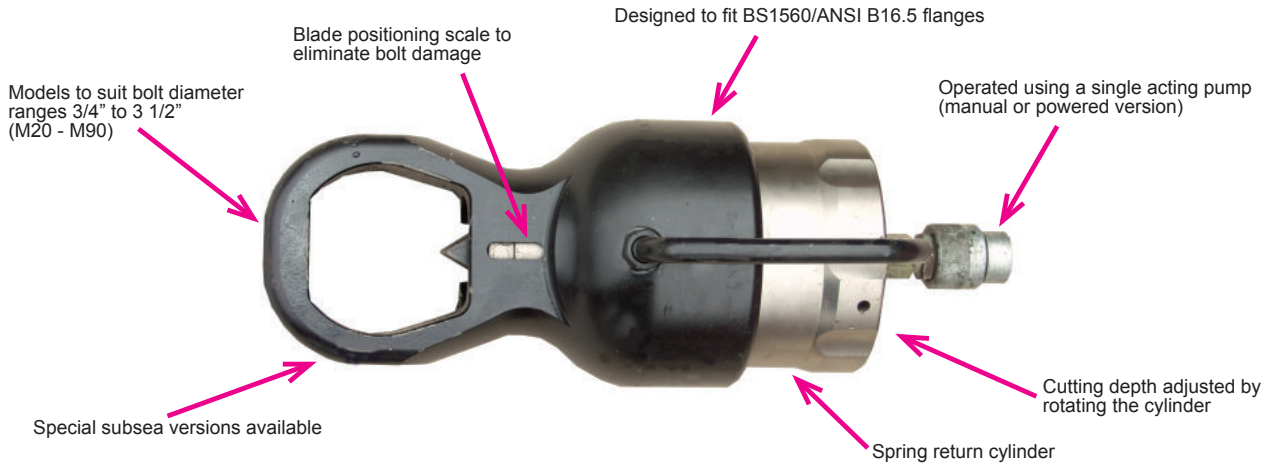

Tool Ref	Bolt Diameter		A mm	B mm	C mm	D mm	E mm	F mm	G mm	Approx weight Kg
	Imperial	Metric								
ENS1-1	3/4"	M20	104.00	228.00	76.00	18.00	104.00	40.50	9.00	6.70
	7/8"	M22								
	1"	M24								
		M27								
ENS1-2		M20	104.00	238.00	90.00	21.00	110.50	40.50	10.00	6.90
	3/4"	M22								
	7/8"	M24								
	1"	M27								
	1-1/8"	M30								
ENS2-1	1-1/4"	M33	138.00	305.00	102.00	22.00	132.00	57.50	6.00	15.80
	1-3/8"	M36								
	1-1/2"	M39								
	1-1/8"	M30								
ENS2-2	1-1/4"	M33	138.00	314.00	114.00	23.00	141.00	57.50	6.00	16.00
	1-3/8"	M36								
	1-1/2"	M39								
	1-5/8"	M42								
	1-3/4"	M45								
ENS3-1	1-3/4"	M45	190.00	406.00	132.00	28.00	189.00	80.50	8.00	42.00
	1-7/8"	M48								
	2"	M52								
ENS3-2	1-3/4"	M45	190.00	416.00	145.00	30.00	199.00	80.50	8.00	42.50
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
ENS3-3	1-3/4"	M45	190.00	426.00	160.00	31.50	200.00	80.50	7.00	43.00
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60								
ENS3-4		M64	190.00	437.00	174.00	35.00	204.00	80.50	9.00	44.00
	1-3/4"	M45								
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60								
ENS4-1	2-3/4"	M76	235.00	474.00	189.00	36.50	235.00	110.50	4.00	73.00
	3"	M80								
ENS4-2	2-3/4"	M76	235.00	495.00	219.00	41.00	240.00	110.50	3.00	75.00
	3"	M80								
	3-1/4"	M85								
	3-1/2"	M90								

Nut splitter models are available to hire or purchase

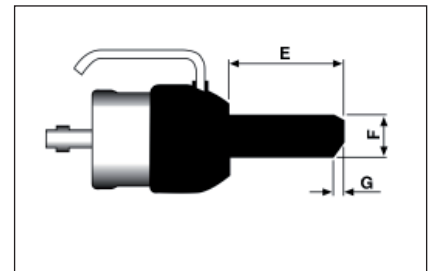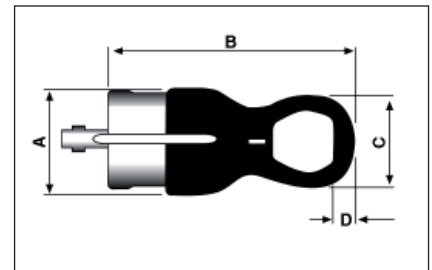

• No statement or data within this literature is warranted or guaranteed to be accurate.

Whilst every effort has been made to ensure the availability of the models and specifications within this catalogue, our policy of continuous improvement means specifications and models are liable to change without notice. We reserve the right to change the specifications and models available for sale or hire and to supply equivalent products where appropriate.

W.CHRISTIE (INDUSTRIAL) LTD

CHRISTIE HOUSE, MEADOWBANK ROAD,
ROTHERHAM, SOUTH YORKSHIRE, S61 2NF, UK
T : +44(0)1709 550088 F : +44(0)1709 550030
E : INFO@WCHRISTIE.COM W : WWW.WCHRISTIE.COM

REGISTERED OFFICE: UNIT F7, FESTIVAL BUSINESS CENTRE,
150 BRAND STREET, GLASGOW, G51 1DH SCOTLAND
T: +44(0)141 427 9801 F: +44(0)141 427 9802
E: WCHRISTIEGLW@BTCONNECT.COM
REGISTRATION NO: SC 035247



CERTIFICATE NO: 2539/00