

New C-RAD Models

The C-RAD 40DX, 70 & 150 pneumatically powered torque tools are an ideal choice for tough bolt tightening and un-tightening operations. The latest compact motor and gearbox technologies combine to offer the highest power to weight ratio of any tools on the market.




C-RAD 40DX, 70 & 150 Pneumatic Torque Tools

Torque control is achieved by adjustment of the air pressure via a C-RAD Lubro Unit installed between the air compressor and torque tool

Standard Heavy Duty

(Sold Separately)

- Non-impacting (vibration levels below 2.5 m/s²)
- Accuracy within +/- 4%
- Compact design
- Low noise level – below 85db
- Neutral setting to prevent accidental start-up
- All tools are supplied with a dedicated calibration certificate

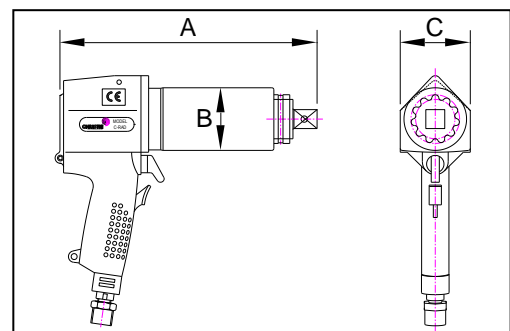

Model	Dimensions (mm)			Weight (Kg)		Speed rpm	Torque Range (Nm)		Square Drive
	A	B	C	Without Reaction	Including Reaction		Min	Max	
C-RAD 40DX	289	81	83	7	9	6	1,200	4,000	1"
C-RAD 70	330	95	95	10.7	15.7	4.5	2,000	7,000	1.1/2"
C-RAD 150	415	127	127	19	30	3	5,400	15,000	1.1/2"

W. CHRISTIE (INDUSTRIAL) LTD

CHRISTIE HOUSE, MEADOWBANK ROAD,
ROTHERHAM, SOUTH YORKSHIRE, S61 2NF UK
T: +44(0)1709 550088 F: +44(0)1709 550030
E: INFO@WCHRISTIE.COM

www.wchristie.com

No statement or data within this literature is warranted or guaranteed to be accurate.