


## C-RAD 570 PNEUMATIC TORQUE WRENCH – TECHNICAL DATA

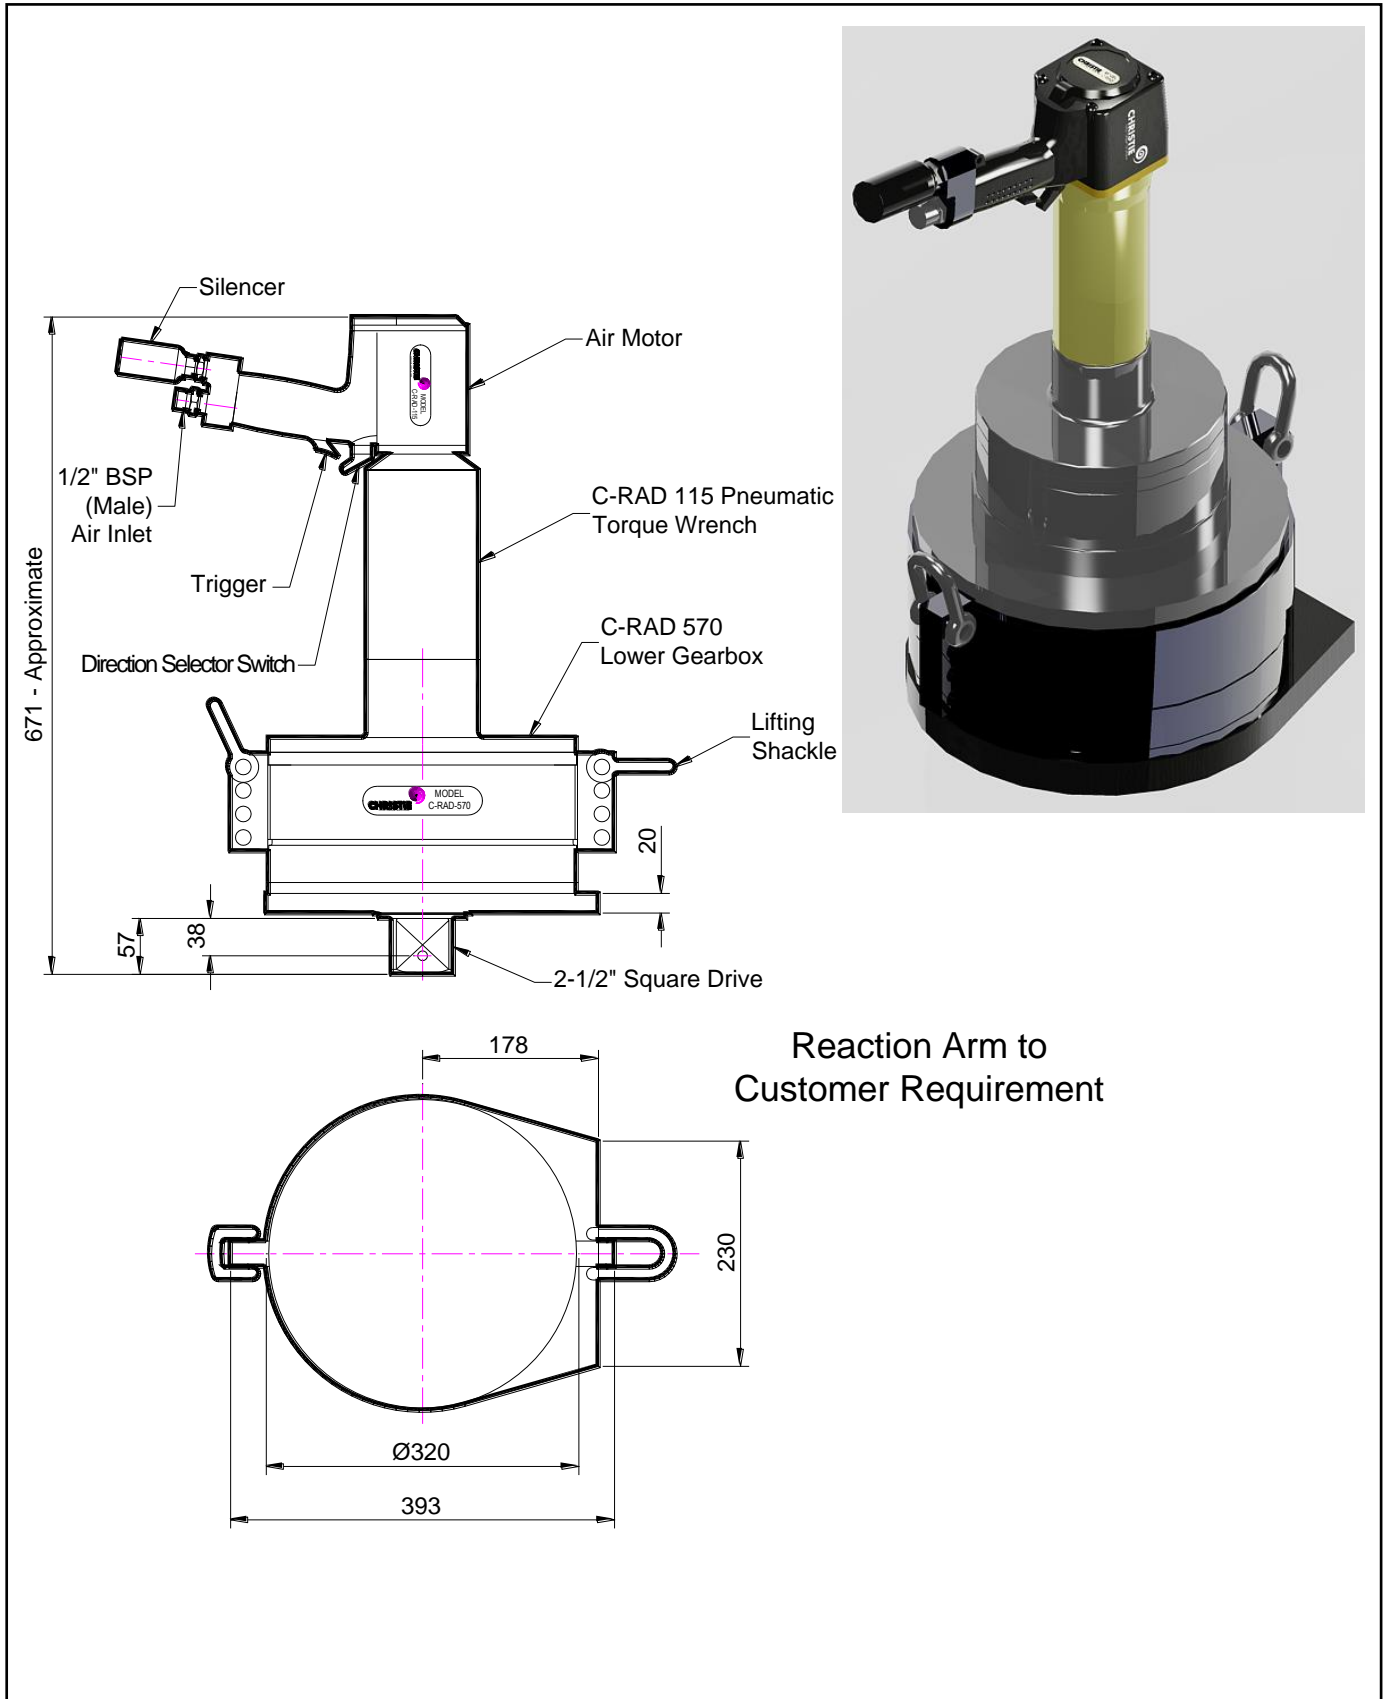

# C-RAD 570 PNEUMATIC TORQUE WRENCH – TECHNICAL DATA

## DESCRIPTION

The Heavy Duty C-RAD 570 Pneumatic Torque Wrench is a modular, air driven reversible, non-impacting torque delivery tool intended to tighten and un-tighten nuts, bolts and threaded fasteners.

The Heavy Duty C-RAD 570 wrench is made up of a smaller size C-RAD 115 Wrench and a lower gearbox multiplier complete with reaction and square drive.

Each Heavy Duty C-RAD 570 wrench is supplied with two calibration certificates:-

- One for use with the Heavy Duty CRAD 570 wrench Assembly (For Higher torque range)
- One for use with the smaller size C-RAD 115 wrench (For Lower Torque Range)

The heavy duty C-RAD 570 wrench assembly calibration certificate has two serial numbers displayed. One is the number stamped on the motor back plate and the other is the number stamped on the lower gearbox multiplier.

The smaller size C-RAD 115 wrench calibration certificate will contain the serial number stamped on the motor back plate only.

All C-RAD tools must always be used with the following:-

- A Clean Dry Air Supply with a minimum flow of 19L/Sec (40 CFM)
- Lubro Control Unit (with filter regulator, lubricator)
- Impact Quality Sockets
- Ring and pin fastener system (or similar)
- Reaction Arm

If the intended use is other than for nuts, bolts and threaded fasteners contact W. Christie (Industrial) LTD

It is the responsibility of the user to consider associated site risks before introducing the equipment into the work-place.

## SPECIFICATION (C-RAD 570 Wrench Assembly)

Output Square Drive (Male):	2-1/2" (63.5mm)
Direction:	Forward & Reverse
Torque Accuracy:	+/- 4%
Minimum Output Torque:	13,500 Nm (9,957 lbf.ft)
Maximum Output Torque:	57,000 Nm (42,041 lbf.ft)
Speed:	0.9 rpm (Single)
Air Consumption:	19 litres/second (40 cfm)
Maximum Air Pressure:	7.2 bar (105 psi)
Noise:	Less than 85 dB(A)
Vibration:	Vibration level at handle does not exceed 2.5m/sec (Low)
Tool Weight:	102 Kg (225 lbs)

## ACCESSORIES AVAILABLE

The following accessories are available upon request and can be custom made to suit requirements. Please contact W. Christie (Industrial) Limited for more information:-

- Special Reactions
- Custom Lifting Points
- Nose Cone Extensions
- Offset Gearbox
- Custom Lubro Units
- Impact Quality Sockets
- Torque Checking System (Rundown Fixture)

**NOTE:-** For C-RAD 115 Pneumatic Torque Wrench information please refer to separate technical data sheet.

No statement or data within this literature is warranted or guaranteed to be accurate.



W. CHRISTIE (INDUSTRIAL) LTD  
CHRISTIE HOUSE  
MEADOWBANK ROAD  
ROTHERHAM  
SOUTH YORKSHIRE  
S61 2NF UK  
T: +44(0)1709 550088 F: +44(0)1709 550030  
E: [INFO@WCHRISTIE.COM](mailto:INFO@WCHRISTIE.COM) W: [WWW.WCHRISTIE.COM](http://WWW.WCHRISTIE.COM)