


BC-RAD 40X SELECT DIGITAL BATTERY TORQUE WRENCH TECHNICAL DATA

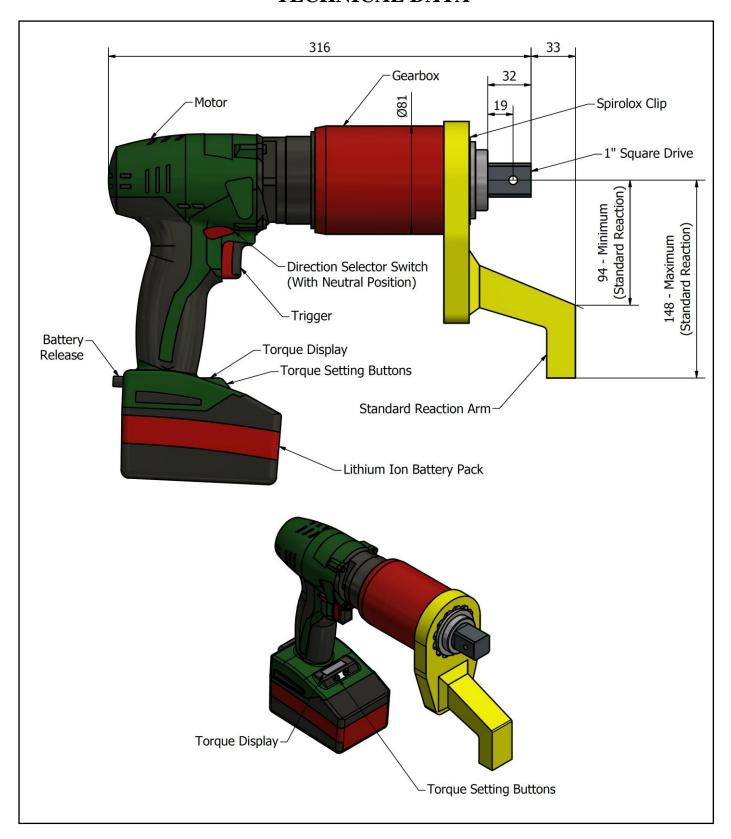

BC-RAD 40X SELECT DIGITAL BATTERY TORQUE WRENCH TECHNICAL DATA

DESCRIPTION

The BC-RAD 40X Select Digital Battery Torque Wrench is a hand held, non-impacting battery driven power tool designed to apply torque to tighten and remove threaded fasteners.

The reaction force works in the opposite direction to the applied torque. The point of reaction should be kept as far away as practicable from the centre of the gearbox to minimise this force.

Torque is controlled by use of the torque setting buttons. The torque figure is displayed on the torque display.

The BC-RAD 40X Select must always be operated with the following:-

- Lithium Ion Battery Pack (Supplied)
- Impact Quality Sockets
- Reaction Arm
- Battery Charger (Supplied)

SPECIFICATION

Output Square Drive (Male): 1" (25.4mm)

Direction: Forward & Reverse

Torque Accuracy: +/- 10%

Minimum Output Torque: 800 Nm (590 lbf.ft)
Maximum Output Torque: 4,000 Nm (2950 lbf.ft)

Speed: 1.8 rpm (Single)
Battery Charging Temp Range: 0°C To 50°C

Battery Charger Voltage: 110V or 240V (dependant on model purchased)

Noise: Less than 85 dB(A)

Vibration: Vibration level at handle does not exceed 2.5m/sec (Low)

Tool Weight: 6.2 Kg (13.67 lbs)
Reaction Plate Weight: 2 Kg (4.41 lbs)

ACCESSORIES AVAILABLE

The following accessories are available upon request and can be custom made to suit requirements. Please contact W. Christie (Industrial) Limited for more information:-

- Spare Lithium Ion Battery Packs
- Special Reactions
- Nose Cone Extensions
- Offset Gearbox
- Impact Quality Sockets
- Torque Checking System (Rundown Fixture)

No statement or data within this literature is warranted or guaranteed to be accurate.



W. CHRISTIE (INDUSTRIAL) LTD CHRISTIE HOUSE MEADOWBANK ROAD ROTHERHAM SOUTH YORKSHIRE S61 2NF UK

T: +44(0)1709 550088 F: +44(0)1709 550030

E: INFO@WCHRISTIE.COM W: WWW.WCHRISTIE.COM