


Industrial Torque Wrench Handles

Adjustable Models

Technical Specifications

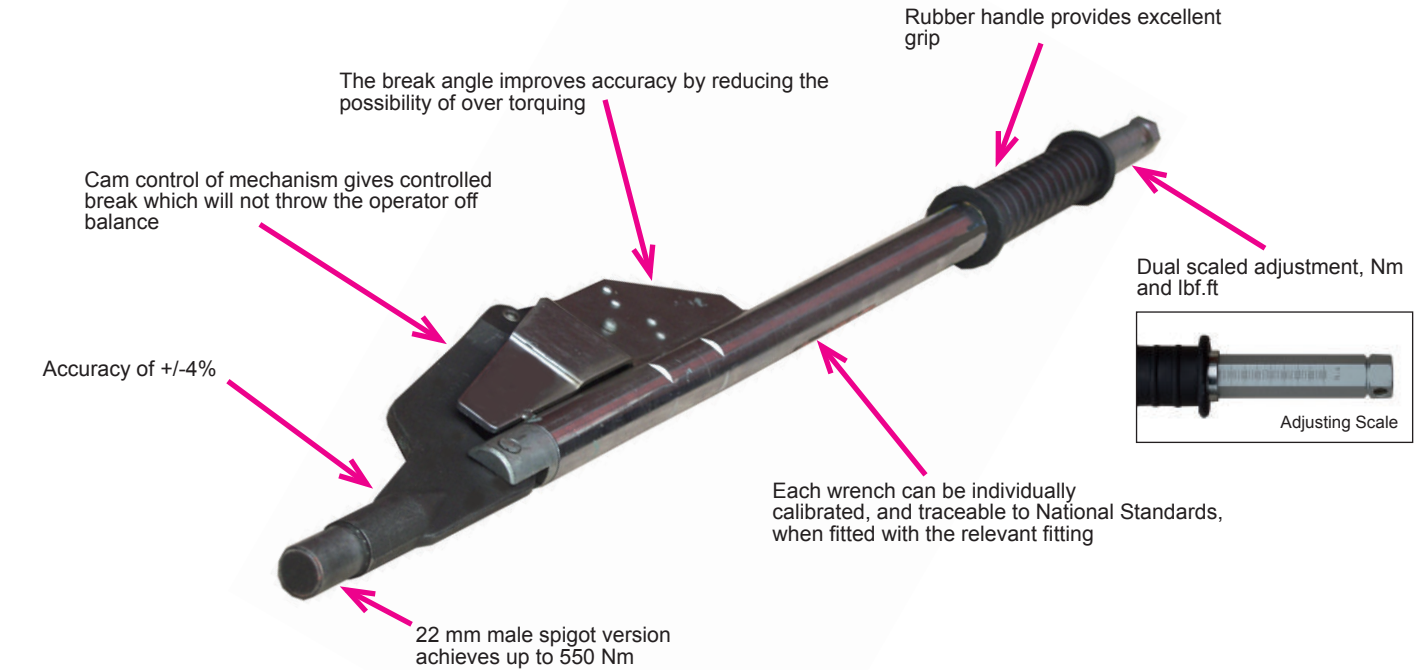

1" square spigot version achieves up to 1,500 Nm




Available fittings



Formula for Calculating the Effect of Torque Wrench Extensions

$$M2 = M1 \times L2/L1$$

Where L1 is the normal length and L2 is the extended length, M1 is the set torque and M2 the actual torque applied to the nut.

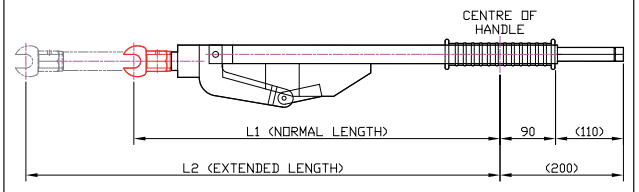

| Model | End Fitting | Part Code | Range | | Length (L1) | Weight |
|--------|------------------|-----------|-----------|-----------|-------------|--------|
| | | | Nm | lbf.ft | mm | |
| 4 TH | 22mm Spigot | 12003 | 130-550 | 100-400 | 793.4 | 5 |
| 4R TH | 1" Female square | *OBD | 150-700 | 100-500 | 924.4 | 6 |
| 4AR TH | 1" Female square | *OBD | 200-800 | 150-600 | 974.4 | 6 |
| 5R TH | 1" Female square | *OBD | 300-1,000 | 200-750 | 1255 | 7 |
| 5AR TH | 1" Female square | *OBD | 700-1,500 | 500-1,000 | 1272.4 | 10 |

*OBD - order by description

• No statement or data within this literature is warranted or guaranteed to be accurate.

Whilst every effort has been made to ensure the availability of the models and specifications within this catalogue, our policy of continuous improvement means specifications and models are liable to change without notice. We reserve the right to change the specifications and models available for sale or hire and to supply equivalent products where appropriate.

W.CHRISTIE (INDUSTRIAL) LTD

CHRISTIE HOUSE, MEADOWBANK ROAD,
ROTHERHAM, SOUTH YORKSHIRE, S61 2NF, UK
T : +44(0)1709 550088 F : +44(0)1709 550030
E : INFO@WCHRISTIE.COM W : WWW.WCHRISTIE.COM

REGISTERED OFFICE: UNIT F7, FESTIVAL BUSINESS CENTRE,
150 BRAND STREET, GLASGOW, G51 1DH SCOTLAND
T: +44(0)141 427 9801 F: +44(0)141 427 9802
E: WCHRISTIEGLW@BTCONNECT.COM
REGISTRATION NO: SC 035247



CERTIFICATE NO: 2539/00