
KLW4010 SERIES POWER PACK – TECHNICAL DATA



Item	Description	Item	Description
1	Oil Reservoir	8	Electrical Control System
2	Gauge	9	Motor
3	Frame for Protecting	10	Oil Filling Port
4	Regulating Valve	11	Solenoid Valve
5	Valve Assembly	12	Cooler
6	Oil Lever Measure	13	Tank Cover
7	Oil Releasing Port	14	Coupler

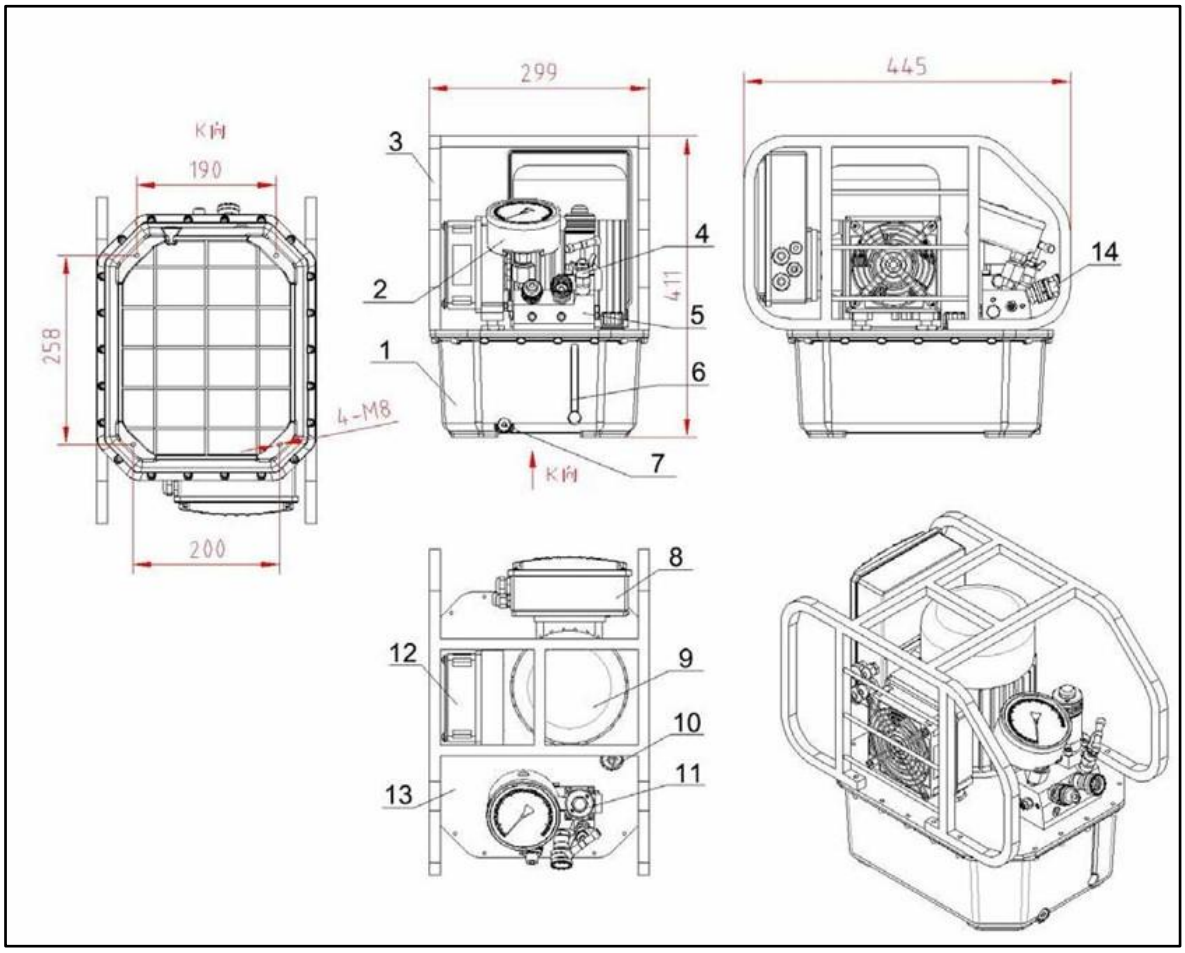

No statement or data within this literature is warranted or guaranteed to be accurate.

KLW4010 SERIES POWER PACK – TECHNICAL DATA

DESCRIPTION

The KLW4010 Series multi-port power pack is a portable, electrically actuated, double acting, 3 stage pump.

The unit can simultaneously run two torque tools at the same time. Changing the valve block allows for the use of four torque tools simultaneously.

The power pack is supplied complete with one control pendant / cable assembly and two hydraulic hose assemblies.

The unit is operated using the two button control pendant.

SPECIFICATION

Electrical Supply Options (In):	115V, 60 Hz (1.2 Hp) / 220V, 50 Hz (1.6 Hp) / 220, 60 Hz (1.6 Hp)
Max Hydraulic Pressure (Out):	690 bar (10,000 psi)
Pressure Gauge Units:	psi & bar
Flow Rate (Low):	7 litres/minute (0.247 cfm)
Flow Rate (Mid):	1.6 litres/minute (0.057 cfm)
Flow Rate (High):	0.8 litres/minute (0.028 cfm)
Oil Reservoir Capacity:	8 Litres (488.19 in^3)
Hydraulic Hoses Length:	6m
Total Weight (No Oil):	~28 Kg (61.73 lbs)
Noise:	Less than 85 dB(A)
Hydraulic Port Size:	1/4” NPT

ACCESSORIES AVAILABLE

The following accessories are available upon request and can be custom made to suit requirements. Please contact W. Christie (Industrial) Limited for more information:-

- Change the valve block to run 4 tools instead of 2
- Extra length hoses
- Protective storage case
- Portable trolley

No statement or data within this literature is warranted or guaranteed to be accurate.

CHRISTIE
TOTAL TORQUE SOLUTIONS

W. CHRISTIE (INDUSTRIAL) LTD
CHRISTIE HOUSE
MEADOWBANK ROAD
ROTHERHAM
SOUTH YORKSHIRE
S61 2NF UK
T: +44(0)1709 550088
E: INFO@WCHRISTIE.COM W: WWW.WCHRISTIE.COM